


Interactive Flat Panel Display

TA-65/TA-75/TA-86



UHD
Resolution



4GB RAM
32GB ROM



40 touch
points



Android 14



Zero bonding



Share screen



USB Type-C



8 arrays



Split screen



Remote control

Interactive Flat Panel Display

Display			
Size	65inch	75inch	86inch
Type	DLED		
Aspect ratio	16:9		
Screen display size (mm)	1428*803	1646*925.5	1892*1064
Physical resolution	3840 × 2160 (4k)		
Display color	10bit/1.07 Billion		
Refresh rate	60Hz		
Brightness	≥400cd/m ²		
Contrast	4000:1		
Response time	6ms		
Viewing angle	178°/ 178°		
Display protection	4mm full tempered high explosion-proof glass		
Backlight life	50000 hours		
System			
CPU	8*A55		
System version	Android 14		
RAM	4GB		
ROM	32GB		
Operating temperature	0°C-40°C		
INTERACTIVITY			
Touch Technology	IR		
Touch points	40 points		
Positioning Accuracy	1mm		
Drive Mode	Drive Mode		
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter		
Palm erase	Yes		
Communication Port	USB 3.0		
Reaction time (Single touch)	<4ms		
Touch resolution	32768 x 32768		
Times of touches	Unlimited time in theoretical		
Transfer speed	12Mb/s		

Interactive Flat Panel Display

Compatibility	Support windows, Android, Mac OS, Linux		
Connectivity			
Back port			
HDMI IN	X2		
HDMI OUT	x1		
RJ45 IN	x1		
AV IN	X1		
YPBPR	x1		
Touch USB	X1		
VGA Audio IN	X1		
VGA IN	X1		
SPDIF OUT	X1		
USB 3.0	X1		
USB 2.0	X1		
TF CARD	X1		
RS232	X1		
Earphone	X1		
WIFI	Wifi 6, support 100Mbps		
Mic	X1		
Front port			
HDMI IN	X1		
USB-A 3.0	X2		
USB TOUCH	x1		
USB-C	x1		
Dimension			
Overall dimensions (mm, L×W×T)	1485*105*905	1708*105*1026.5	1954*105*1165
Net weight	37.7kg	51.5kg	67.2kg
Gross weight	46.5kg	64.6kg	85.2kg
Packaging size (mm, L×W×T)	1600*205*1001.5	1846*215*1180	2092*215*1319
VESA	500x400	600x400	800x400
Power Supply			


Interactive Flat Panel Display

Consumption rate	≤190W	≤270W	≤320W
Standby power	≤1W		
Voltage range	AC100-240V~50/60Hz		
Speaker specification	2 x 15 Watts		
Operating temperature	32°F-104°F (0°C-40°C)		
Storage temperature	-4°F-140°F (-20°C-60°C)		
Humidity	5%-80% relative humidity, non-condensing		

Accessories

Power cable	x1
Remote control	x1
Wall mount	x1
HDMI & Touch USB cable	x1
Whiteboard pen	x2

Dimensions

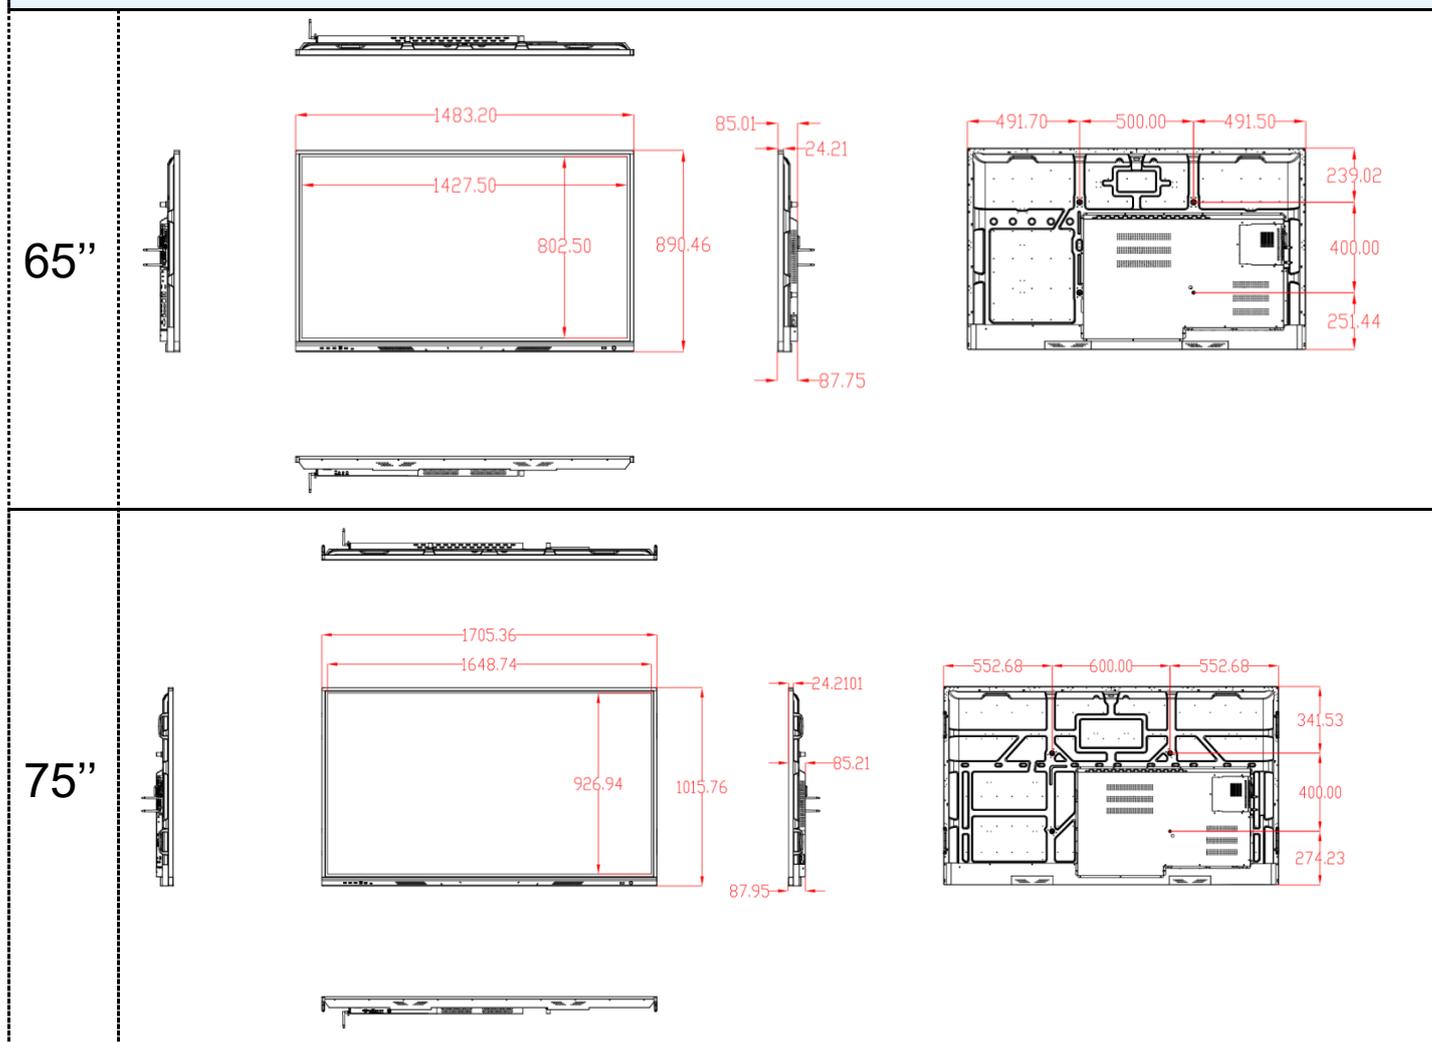

Interactive Flat Panel Display

